

All information in this catalogue is provided for information purposes only and Fenos makes no representations about the accuracy or completeness of the information in this catalogue. Fenos may revise the information and technical data contain hereinat any time without notice.

Weststraat 129e 9940, Evergem, Belgium

+32 (0) 9 335 81 49 VAT: BE0671.501.997





TECHNICAL COMPETENCE

1

Focus On Light Distribution

In a professional lighting design project, light sources with several light distributions are required. Using special optics of the latest technology makes Fenos products suitable for a wide range of applications:

From uniform wallwashing for vertical illumination to narrow beam spots to create shadows and enhance modelling effect, low glare optics for office applications or oval distributions for corridors.










Thermal Design

All Fenos products are equipped with LED light sources. For LEDs, proper heat dissipation is a key element to ensure the quality and life time of the product. During the design process, a lot of attention is paid in order to ensure maximum heat transfer and in the production line, quality control department makes regular checks and measurements with high accuracy thermometer to check the performance of heatsink and ensure that the temperature on LED is far below the allowed limits of LED temperature.



This will maximize the life time of LED and also consistency of color characteristics.



High Quality LEDs

LED is the heart of a light source. In all Fenos products, LEDs are supplied from the best manufacturers in the world to ensure the constancy in color and quality of light.



Innovative Products Overview

Vaswa Maxi XS

Are you looking for a light fixture to high light vertical elements of up to 20 meters and still energy efficient? Are you thinking of creating bright spots on the floor to create a more drama feeling in an outdoor environment? Check specification of Vaswa Maxi XS in page 184.



Nian XS

In many indoor architectural lighting applications, an extreme narrow spot light distribution is required to highlight visually important elements. Nian XS which is a extension of formerly existing Nian family is a perfect solution for that. Check specification of Nian XS in page 60.





Roni

Roni is the other word for flexibility in lighting. With one size and concept of downlight you can have a wide range of light distribution. Check specification of Roni in page 94.



Felka Mini

Felk Mini track lights have the widest range of light distributions. Having special optics from extreme spot (5°) to extreme wide (60°) and wall washer or oval light distributions, makes Felka Mini a perfect solution for high end museums, galleries and retails. Check specification of Felka Mini in page



Darklans

Darklans is equiped with an advanced optic developed by Bartenbach Gmbh. This small but still powerful downlight has an aperture of only 8mm, and even when the fixture is on, one can hardly see any light coming out of it. A real dark light. Check specification of Darklans in page 14.

6 110. **Feros**

INDEXIndoor

Ceiling Recessed Light













































INDEXIndoor

Track Light













Linear Light















INDEXOutdoor

Outdoor light











Accessories







INDEX

Category	Name	Page Number	
Indoor Light	Darklans Eyren Micro Filde Micro Filde Mini Rico Slbron CF-TR Sibron C Micro Sibron C Midi Sibron C Maxi Tiran C Mini Nian Sibron Q Mini Sibron Q Midi Sibron Q Midi Sibron Q Maxi Eyden Mini Eyden L Tiran S Fitran Q Roni WW Roni Valman Felka Mini Felka Midi Felka Maxi Pelka Vera Vera Twin	Page Number 14 18 22 26 30 34 38 42 46 50 54 60 64 68 72 76 80 84 90 94 98 102 110 118 124 130 134 138	Ceiling Recessed Light Track Light
	Sira S 1616 Sira R 1616 Sira OL Sira S 6090 Sira P 6090 Sira R 6090 Sira R 6040	142 146 150 154 158 162 166	Linear Light
Outdoor Light	Silva Midi Silva Maxi Vaswa Midi Vaswa Maxi Torso	172 176 180 184 188	Profile Light
Accessories	Surface Track 3Phase Accessories Krab Beno LED Strip	194 194 196 196	



Indoor Lighting

Interior architecture is strongly influenced by lighting. Fenos has a wide range of products for professional indoor lighting with different light distributions, sizes and lumen outputs.

Darklans

Ceiling Recessed



Darklans



Ceiling Recessed







CODE	F180
Light source	LED
Power (W)	9
luminous flux (lm)	800 850
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Silver





Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications: Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Because of using a special double focus optic, the light is coming out of a very small hole with just 8mm diameter. As a result, the glare of the light reduced to minimum, so it seems off when the light is on.




▲ Hana Bouitque Hotel

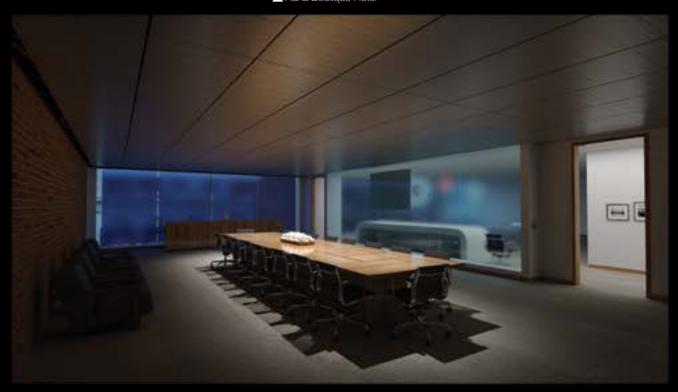

Darklans

Light distributions



Accessories

Mandatory



Trimless Installation Kit Order code: 2180924109

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🏺	Body Color
White	F180W930M	Medium	F180W940M	White
Black	F180B930M	Medium	F180B940M	Black
Silver	F180S930M	Medium	F180S940M	Silver

Eyren Micro Ceiling Recessed





Eyren Micro



Ceiling Recessed





	92 mm
ø45mm	

CODE	F190
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Silver

1P 70mm

Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


The conical shaped of this fixture and the the deeply placed LED light, make sure that glare is reduced to a minimum when Eyren Micro is installed in the ceiling

^{*}Customized body colors and other color temperatures (CCTs) are available upon request

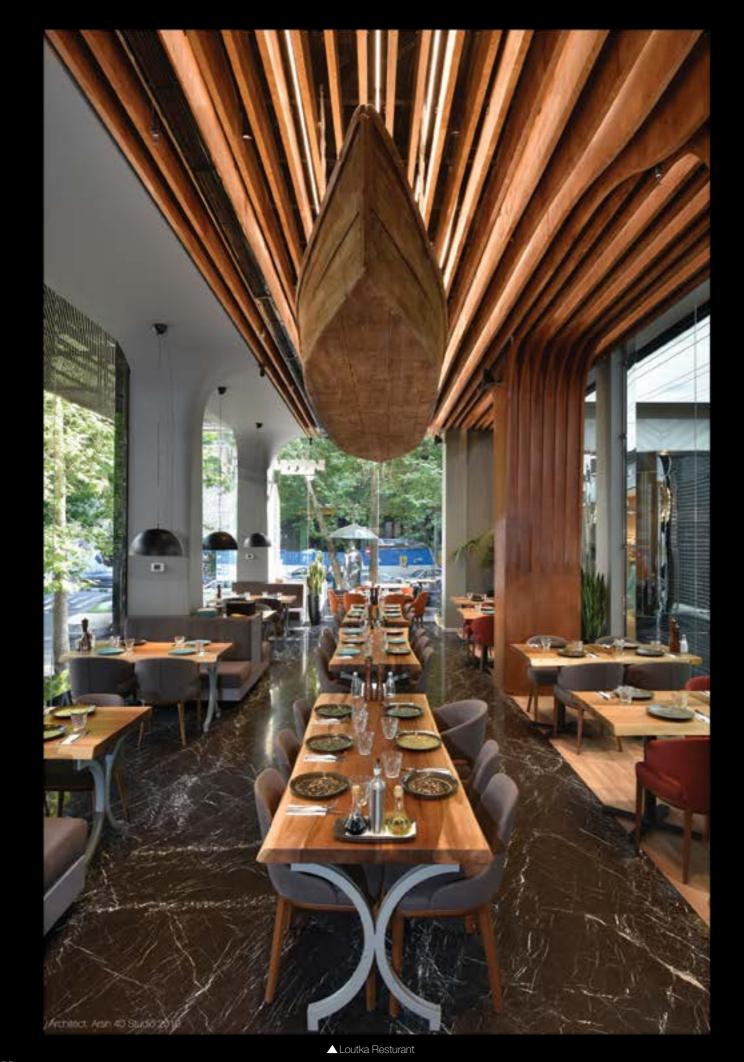

Eyren Micro

Light distributions

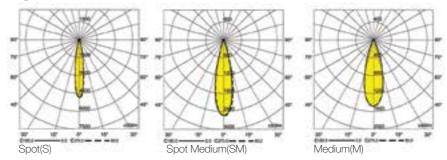

Accessories

Mandatory



Trimless Installation Kit Order code: 2180924109

Order code table -

Body Color	3000K 🔮	Beam Angle	4000K 🔮	Body Color
	F190W930S	Spot	F190W940S	
White	F190W930SM	Spot Medium	F190W940SM	White
	F190W930M	Medium	F190W940M	
Body Color	3000K 🔮	Beam Angle	4000K 🔮	Body Color
	F190B930S	Spot	F190B940S	
Black	F190B930SM	Spot Medium	F190B940SM	Black
	F190B930M	Medium	F190B940M	
Body Color	3000K 💮	Beam Angle	4000K 🔮	Body Color
	F190S930S	Spot	F190S940S	
Silver	F190S930SM	Spot Medium	F190S940SM	Silver
	F190S930M	Medium	F190S940M	

Filde Micro


Ceiling Recessed



Filde Micro



Ceiling Recessed







CODE	F123
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



IP 70mm Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


Filde Micro is a minimal adjustable downlight with different light distributions from spot to wide.



▲ Kafi Abadi Residential


Filde Micro

Light distributions

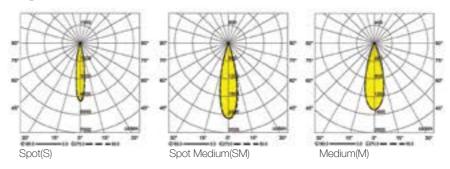

Accessories -

Optional



Recessed Kit Order code: 2123924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
	F123W930S	Spot	F123W940S	
White	F123W930SM	Spot-Medium	F123W940SM	White
	F123W930M	Medium	F123W940M	
Body Color	3000K 🌵	Beam Angle	4000K 🔮	Body Color
	F123B930S	Spot	F123B940S	
Black	F100D0000M	Coat Madium	F123B940SM	Black
DIACK	F123B930SM	Spot-Medium	1 12009400101	Diack

Filde Mini Ceiling Recessed



Filde Mini



Ceiling Recessed





		1
2		88 mm
15°C	90 mm	15 →

CODE	F124
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



IP 84mm Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request



▲ Aban Residential

Filde Mini

Light distributions




Accessories -

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2124924125

Order code table _____

Body Color	3000K 🔮	Beam Angle	4000K 🍨	Body Color
\A/I=:+=	F124W1230S	Spot	F124W1240S	White
White	F124W1230M	Medium	F124W1240M	VVIIILE

Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
Black	F124B1230S	Spot	F124B1240S	Black
Diack	F124B1230M	Medium	F124B1240M	Diack

Order code for GU10 Version*

Body Color	Body Code	Body Code	Body Color
White	F124WG	F124BG	Black

Lamp is not Included*









Ceiling Recessed






			1		7
	-/			90	nen.
1	1	Tu			6
-		110	nn.		>

CODE	F114
Light source	LED
Power (W)	6
luminous flux (lm)	300
Color Rendering (Ra)	>80
Color Temperature (K)	3000
Body Color	White Black



Supply Voltage:
220-240 Vac,50Hz
Recommended Applications:
Residential | Office | Shop

^{*}Customized body colors and other color temperatures (CCTs) are available upon request

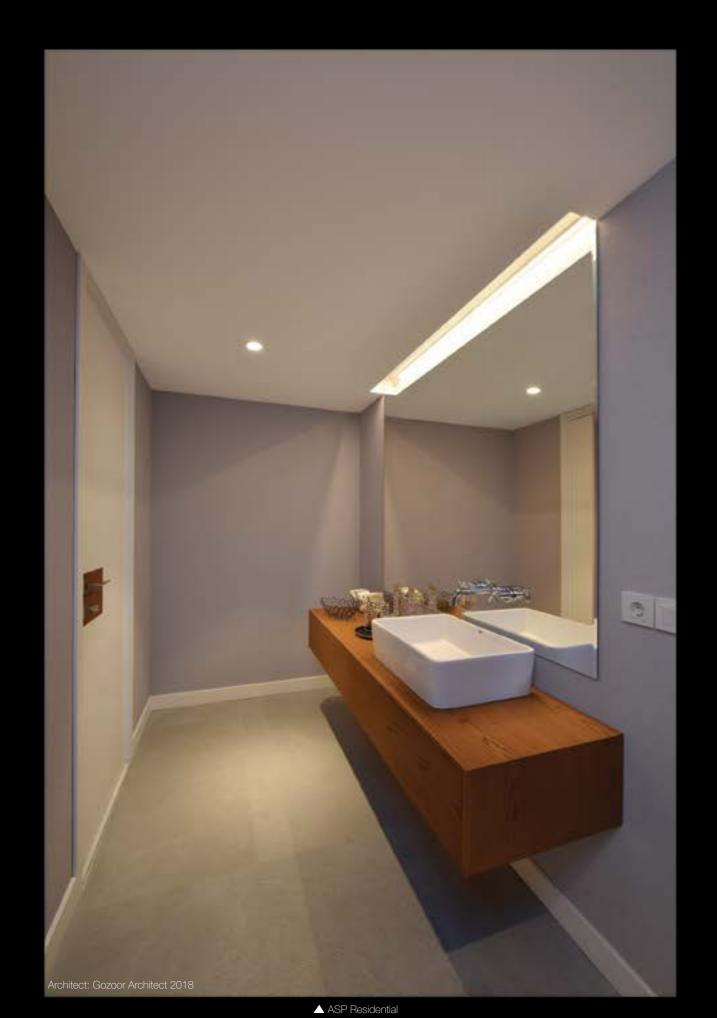

Rico

Light distributions -


Accessories





LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2114924125

Order code for GU10 Version*

Body Color	Body Code	Body Code	Body Color
White	F114WG	F114BG	Black

Lamp is not Included*

Sibron CF-TR

Ceiling Recessed



Trimless lights are also considered by architects and interior designers in modern architectural monuments, as well as in classical architectural monuments.

Sibron CF-TR can be fitted with a special kit on false ceilings with gymsum tiles (such as Knauf) and also on traditional gypsum ceilings.

Sibron CF-TR



Ceiling Recessed







F136
LED
12
1300
>80
3000 4000*
White Black

[P 20 (\$84mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request





Sibron CF-TR

Light distributions -



Accessories -

Optional



LED GU10 Lamp Order code: 10020101

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
\\/bito	F136W1230S	Spot	F136W1240S	White
White	F136W1230M	Medium	F136W1240M	VVIIILE

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
Black	F136B1230S	Spot	F136B1240S	Black
Diack	F136B1230M	Medium	F136B1240M	Black

Order code for GU10 Version*

В	ody Color	Body Code	Body Code	Body Color
	White	F136WG	F136BG	Black

Lamp is not Included*

Sibron C Micro Ceiling Recessed



Sibron C Micro



Ceiling Recessed







CODE	F134
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request

Architect: Z/V 2018

▲ Dorin Ston Parsian


Sibron C Micro

Light distributions

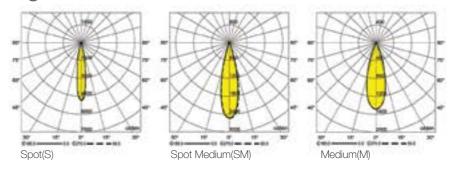

Accessories -

Optional



Recessed Kit Order code: 2123924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
	F134W930S	Spot	F134W940S	
White	F134W930SM	Spot-Medium	F134W940SM	White
	F134W930M	Medium	F1345W940M	
Body Color	3000K 💮	Beam Angle	4000K 🔮	Body Color
	F134B930S	Spot	F134B940S	
Black	F134B930SM	Spot-Medium	F134B940SM	Black
	F134B930M	Medium	F134B940M	

Sibron C Mini Ceiling Recessed



Sibron C Mini



Ceiling Recessed





	allelli.	1
- 1		100 ==
8		8
(→ *

CODE	F135
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black





Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

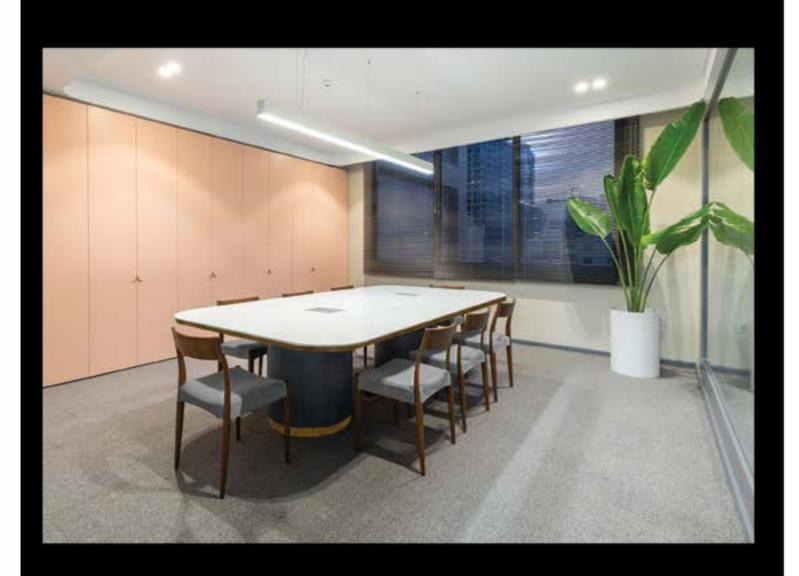

Sibron C Mini

Light distributions




Accessories -

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2135924125

Order code table _____

Body Color	3000K 👰	Beam Angle	4000K 🍨	Body Color
\A/la:+a	F135W1230S	Spot	F135W1240S	White
White	F135W1230M	Medium	F135W1240M	vviiite

Body Color	3000K 🍨	Beam Angle	4000K 🔮	Body Color
Black	F135B1230S	Spot	F135B1240S	Black
Black	F135B1230M	Medium —	F135B1240M	DIACK

Order code for GU10 Version* —

Body Color	Body Code	Body Code	Body Color
White	F135WG	F135BG	Black

Lamp is not Included*

Sibron C Midi Ceiling Recessed



Sibron C Midi



Ceiling Recessed







CODE	F137
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



102mm

Supply Voltage: 220-240 Vac,50Hz


Driver:


DALI Dimmable Version Available upon request

Recommended Applications: Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

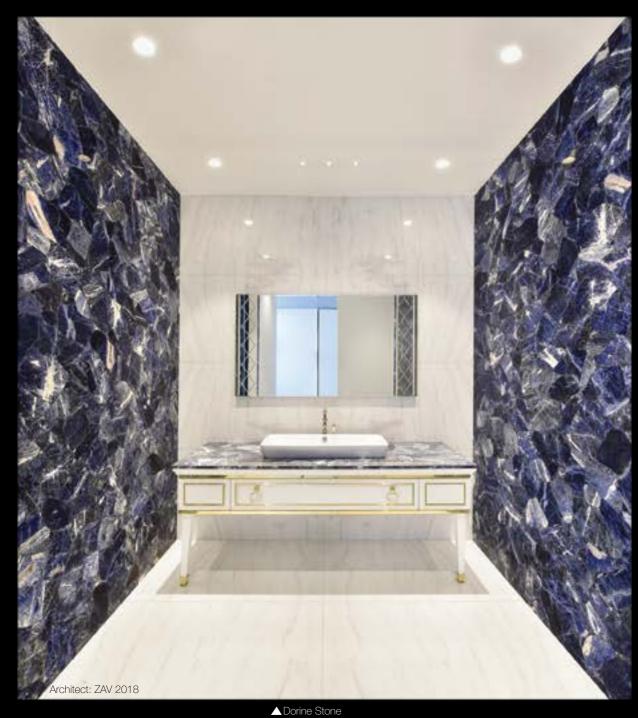

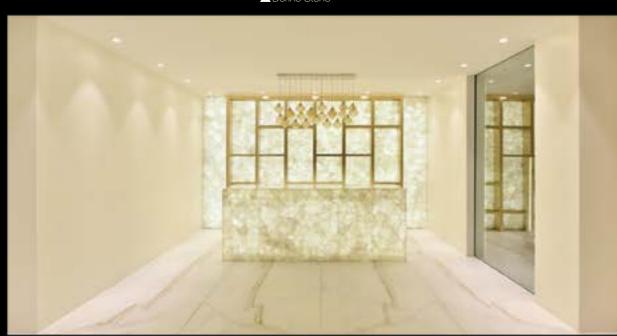


Sibron C Midi

Light distributions



Accessories

Optional



Recessed Kit Order code: 2137924125

Order code table -

Body Color	3000K 🔮	Beam Angle	4000K 🍨	Body Color
\\/\b:\.	F137W2030S	Spot	F137W2040S	White
White	F137W2030M	Medium	F137W2040M	VVIIILE

Body Color	3000K 👳	Beam Angle	4000K 🍨	Body Color
Black	F137B2030S	Spot	F137B2040S	Black
Diack	F137B2030M	Medium	F137B2040M	Diack

Sibron C Maxi Ceiling Recessed



Sibron C Maxi



Ceiling Recessed







CODE	F138
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



Supply Voltage: 220-240 Vac,50Hz Driver:

DALI Dimmable Version Available upon request


Recommended Applications: Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare


Sibron C Maxi

Light distributions



Accessories

Optional



Recessed Kit Order code: 2138924125

Order code table

Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	F138W3030S	Spot	F138W3040S	White
White	F138W3030M	Medium	F138W3040M	vviiite

Body Color 3000K P Beam Angle	Body Color
F138B3030S Spot	F138B3040S Black
F138B3030M Medium	F138B3040M



Tiran C Mini

Ceiling Recessed



Tiran C Mini



Ceiling Recessed





(mil	9/1	
000		90 m
U	D)))))
	100 m	100 mm

CODE	F127
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

[P 20 [] 90mm

Supply Voltage: 220-240 Vac,50Hz

Driver:


DALI|Dimmable Version Available upon request

Recommended Applications:

Residential | Office | Shop


54 Fenosis

The contrast between square shape of the frame and round shape of light source is an interesting feature for many designers.

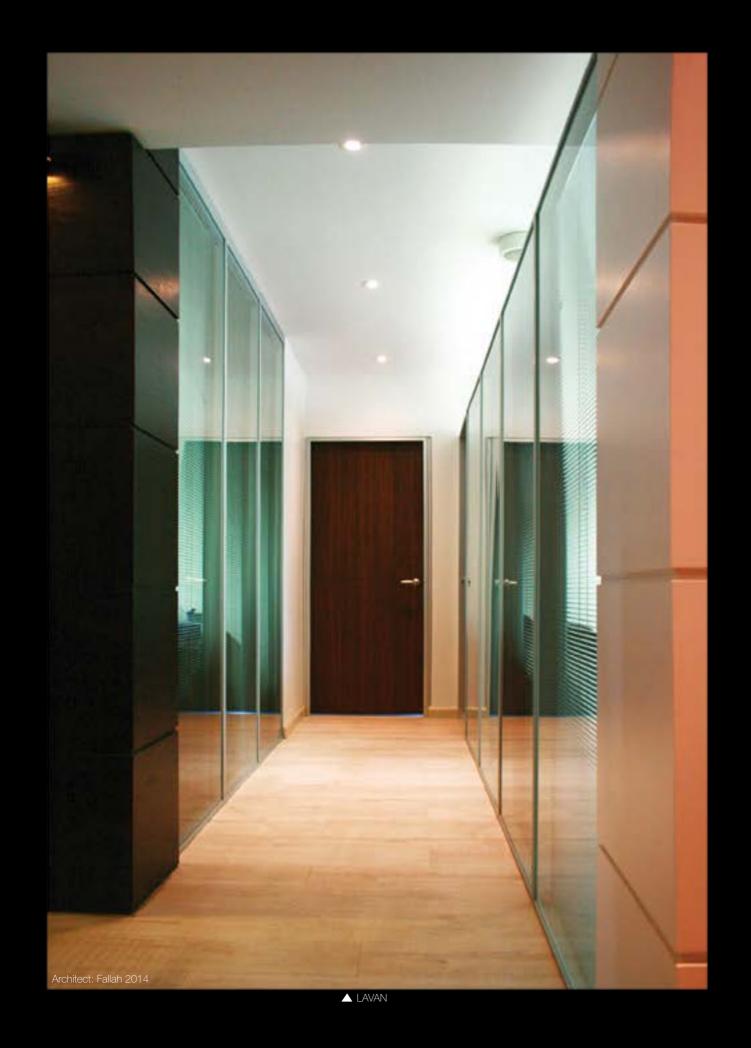

Tiran C Mini

Light distributions




Accessories —

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2127924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
White	F127W1230S	Spot	F127W1240S	White
	F127W1230M	Medium	F127W1240M	VVIIILE

Body Color	3000K 🔮	Beam Angle	4000K 🔮	Body Color
Black	F127B1230S	Spot	F127B1240S	Black
Diack	F127B1230M	Medium	F127B1240M	DIACK

Order code for GU10 Version*

Body Color	Body Code	Body Code	Body Color
White	F127WG	F127BG	Black

Lamp is not Included*








Accent lighting is one of the key elements in architectural lighting design. Spot lighting on objects, attracts people's attention to that object, and creates the feeling of drama in the space.

We as human being like shadows. A completely uniform lit environment resembles a cloudy day for us. The extreme narrow beam of Nian XS family, generated by a sophisticated high tech optic and a powerful compact light source is a good solution. In retail environment, increase level of contrast between light and dark spaces, gives a feeling of more luxury and special feeling to the customer.

Nian



Ceiling Recessed





CODE	F130
Light source	LED
Power (W)	9* 12
luminous flux (lm)	600 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White&Black





Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop | Restaurant

^{*}XS Version

^{**}Customized body colors and other color temperatures (CCTs) are available upon request








Mozafarian JewelleryMozafarian Jewellery 🛕




Nian

Light distributions



Accessories -

Optional



Recessed Kit Order code: 2130924125

Order code table

Body Color	3000K 🔮	Beam Angle	4000K 🔮	Body Color
White & Black	F130WB930XS	Extreme-Spot	F130WB940XS	White & Black
Willo & Black	F130WB1230M	Medium	F130WB1240M	Willia d Black

Sibron Q Mini Ceiling Recessed




Sibron Q Mini



Ceiling Recessed







CODE	F140
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



Supply Voltage: 220-240 Vac,50Hz Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:

Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request





Sibron Q Mini

Light distributions




Accessories –

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2140924125

Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
\A/I=:+=	F140W1230S	Spot	F140W1240S	White
White	F140W1230M	Medium	F140W1240M	vviiite

Body Color	3000K 🏺	Beam Angle	4000K 🍨	Body Color
Black	F140B1230S	Spot	F140B1240S	Black
Diack	F140B1230M	Medium	F140B1240M	Diack

Order code for GU10 Version*

Body Color	Body Code	Body Code	Body Color
White	F140WG	F140BG	Black

Lamp is not Included*

Sibron Q Midi Ceiling Recessed



Sibron Q Midi



Ceiling Recessed







CODE	F141
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP (30) 90mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:

Residential | Office | Shop

^{*}Customized body colors and other color temperatures (CCTs) are available upon request


Architect: Gozzor Architect 2019

▲ Aban Residential ▼




Sibron Q Midi

Light distributions



Accessories -

Optional



Recessed Kit Order code: 2141924125

Order code table

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
\\/\b:to	F141W2030S	Spot	F141W2040S	White
White	F141W2030M	Medium	F141W2040M	vviile

Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
Black	F141B2030S	Spot	F141B2040S	Black
Diack	F141B2030M	Medium	F141B2040M	Diack

O Fenos 71

Sibron Q Maxi Ceiling Recessed



Sibron Q Maxi



Ceiling Recessed







CODE	F142
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

115mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications: Hotel | Office | Shop

^{*}Customized body colors and other color temperatures (CCTs) are available upon request




Sibron Q Maxi

Light distributions



Accessories -

Optional



Recessed Kit Order code: 2142924125

Order code table -

Body Color	3000K 🔮	Beam Angle	4000K 🍨	Body Color
\\/bito	F142W3030S	Spot	F142W3040S	White
White	F142W3030M	Medium	F142W3040M	vviile

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
Black	F142B3030S	Spot	F142B3040S	Black
Diack	F142B3030M	Medium	F142B3040M	Diack

Eyden Mini Ceiling Recessed














CODE	F150
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 95X95mm 113X113 mm (Trimless Version) Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available


upon request

Recommended Applications:

Residential | Office | Shop


Pure minimal design and low glare

^{*}Customized body colors and other color temperatures (CCTs) are available upon request

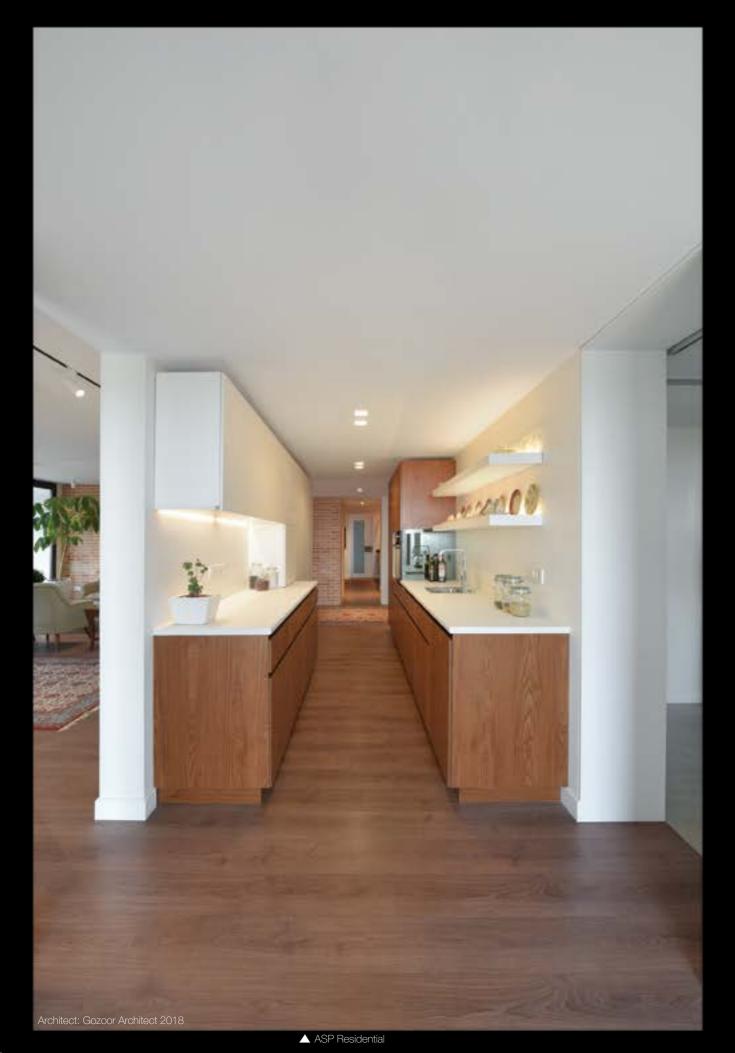

Eyden Mini

Light distributions -



Accessories






Trimless Installation Kit Order code: 2099924117

For Trimless Version Only

Optional



Recessed Kit Order code: 2150924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
White	F150W1030W	Wide	F150W1040W	White
Black	F150B1030W	Wide	F150B1040W	Black

Body Color	3000K 🍨	Beam Angle	4000K 🌵	Body Color
White	F153W1030W	Wide	F153W1040W	White
Black	F153B1030W	Wide	F153B1040W	Black

Eyden L Ceiling Recessed



Eyden L



Ceiling Recessed







CODE	F152
Light source	LED
Power (W)	15
luminous flux (lm)	1500
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black White&Black

IP 95X95mm 113X113 mm (Trimless Version) Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications:

Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Fencs 8 80


This simple square luminaire with deep regressed positioning of the LED guarantees minimal glare

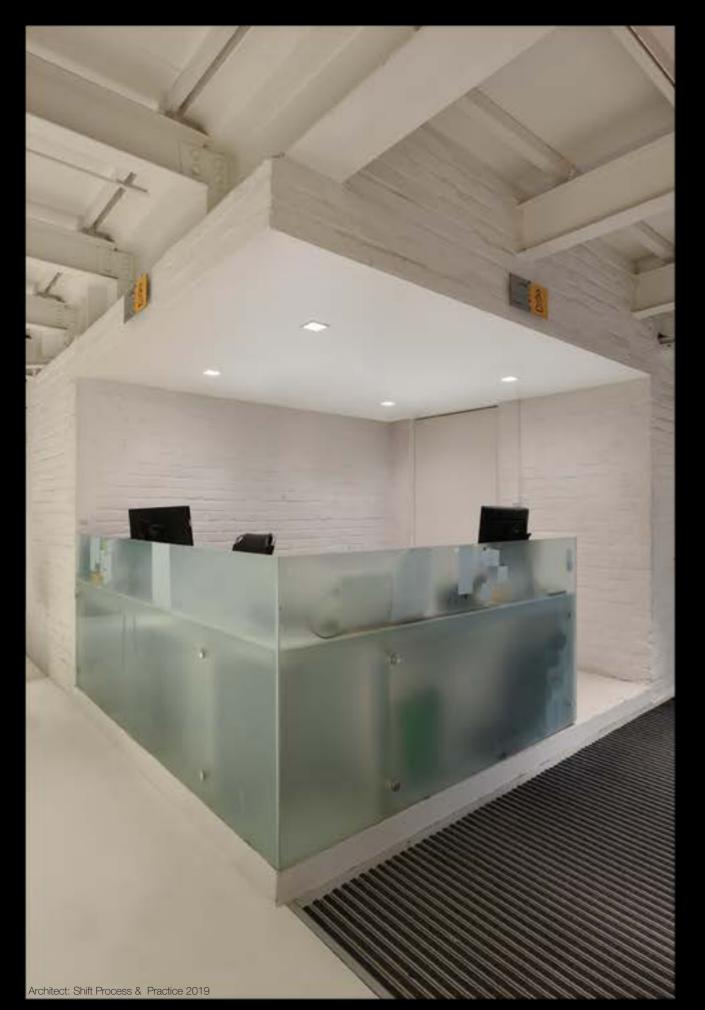

▲ Alibaba Centeral Office

Eyden L

Light distributions _____



Accessories


Mandatory



Trimless Installation Kit Order code: 2099924117

For Trimless Version Only

Optional



Recessed Kit Order code: 2152924125

Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🌵	Body Color
White	F152W1530W	Wide	F152W1540W	White
Black	F152B1530W	Wide	F152B1540W	Black
White & Black	F152WB1530W	Wide	F152WB1540W	White & Black

Body Color	3000K 🍨	Beam Angle	4000K 🔮	Body Color
White	F154W1530W	Wide	F154W1540W	White
Black	F154B1530W	Wide	F154B1540W	Black
White & Black	F154WB1530W	Wide	F154WB1540W	White & Black

Tiran S Ceiling Recessed




Tiran S



Ceiling Recessed







CODE	F120
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 95X95mm 113X113 mm (Trimless Version) Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:


Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

The contrast between square shape of the frame and round shape of light source is an interesting feature for many designers.



Light distributions

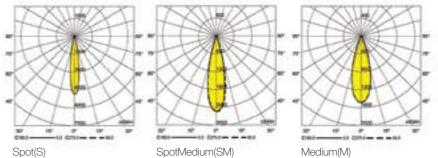


Accessories

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2120924125

Order code table _____


Body Color	3000K 🔮	Beam Angle	4000K 🍨	Body Color
	F120W930S	Spot	F120W940S	
White	F120W930SM	Spot Medium	F120W940SM	White
	F120W930M	Medium	F120W940M	

Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
	F120B930S	Spot	F120B940S	
Black	F120B930SM	Spot Medium	F120B940SM	Black
	F120B930M	Medium —	F120B940M	

Order code for GU10 Version*

Body Color	Body Code	Body Code	Body Color
White	F122WG	F122BG	Black


Lamp is not Included*

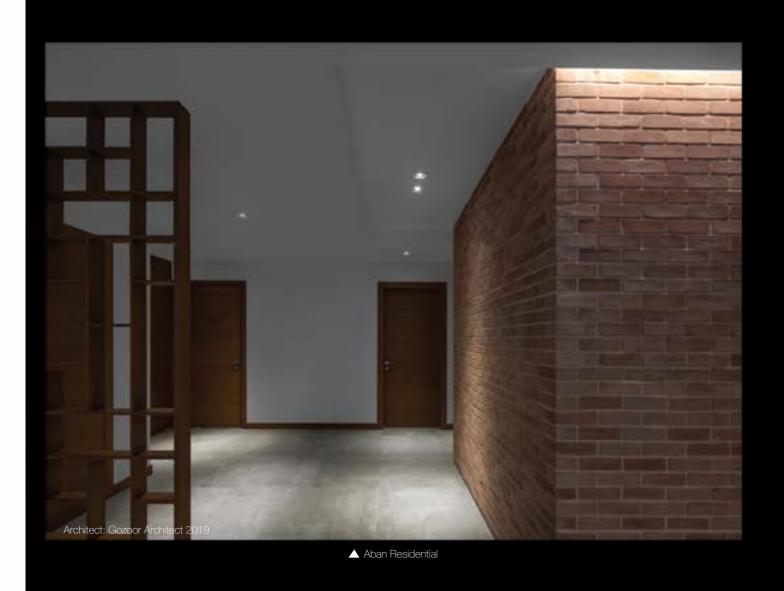

Architect: Persian Garden ▲ JTI Office

Tiran S Trimless

Light distributions

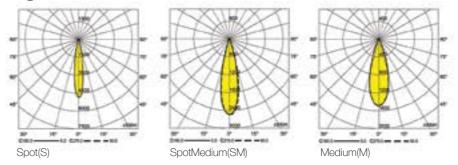


Accessories

Optional



LED GU10 Lamp Order code: 10020101

Mandatory



Trimless Installation Kit Order code: 2099924117

For Trimless Version Only

Order code table _____

Body Color	3000K 🔮	Beam Angle	4000K 🔮	Body Color
	F121W930S	Spot	F121W940S	
White	F121W930SM	Spot Medium	F121W940SM	White
	F121W930M	Medium	F121W94 0M	

Body Color	3000K 👰	Beam Angle	4000K 🔮	Body Color
	F121B930S	Spot	F121B940S	
Black	F121B930SM	Spot Medium	F121B940S	Black
	F121B930M	Medium	F121B940S	

Order code for GU10 Version*

Body Color	Body Code	Body Code	Body Color
White	F126WG	F126BG	Black

Lamp is not Included*

Fitran Q Ceiling Recessed




Fitran Q



Ceiling Recessed







CODE	F119
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

95X95mm 113X113 mm (Trimless Version) Supply Voltage: 220-240 Vac,50Hz Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:

Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request





Fitran Q

Light distributions



Accessories

Optional




LED GU10 Lamp Order code: 10020101

Mandatory

Trimless Installation Kit Order code: 2099924117

rder code: 20999241
For Trimless Version Only

Optional



Recessed Kit Order code: 2119924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
White	F119W1230S	Spot	F119W1240S	\\\/\bite
vvriite	F119W1230M	Medium	F119W1240M	White
Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
Body Color Black	3000K • F119B1230S	Beam Angle Spot	4000K P F119B1240S	Body Color Black

Trimless version Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🏺	Body Color
White	F129W1230S	Spot	F129W1240S	White
VVIIILE	F129W1230M	Medium	F129W1240M	vvriite
Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
Body Color Black	3000K •• F129B1230S	Beam Angle Spot	4000K • F129B1240S	Body Color Black

Order code for GU10 Version*

Body Color	Body Code	Body Code Body Color
White	F119WG	F119BG Black

Order code for Trimless GU10 Version*

Body Color	Body Code	Body Code Body Color
White	F129WG	F129BG Black

Lamp is not Included*

Roni WW Ceiling Recessed



Roni WW



Ceiling Recessed







CODE	F185
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White

IP 84mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop | Gallery


Fenos

Residential | Office | Shop | Gallery Museum

Roni WW is the wallwasher version of Roni family. It provides a uniform illumination on the wall surface, a perfect solution for highlighting architectural features of a building as well as lighting of galleries and museums. It's special design, makes the glare as low as possible.


94

 $^{^{\}star}\text{Customized}$ body colors and other color temperatures (CCTs) are available upon request

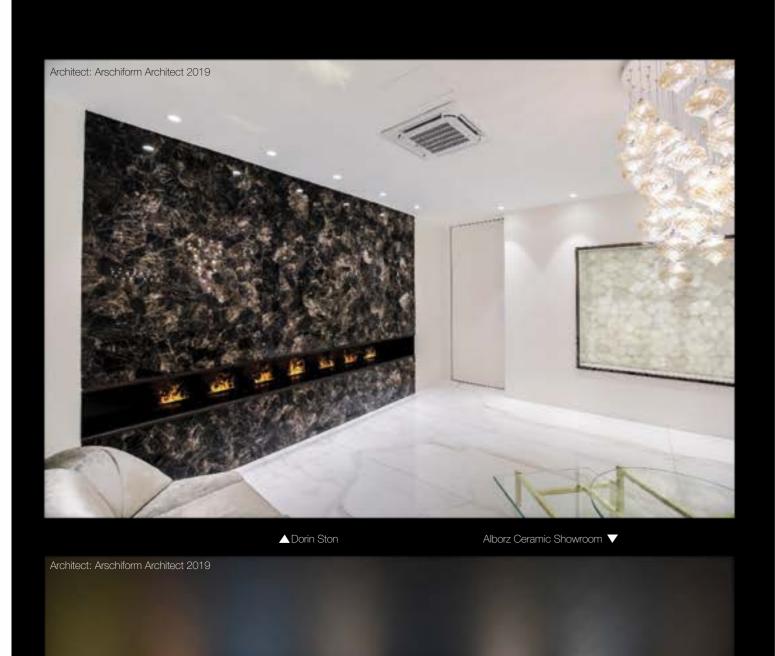

Roni WW

Light distributions —




Accessories

Optional



Trimless Installation Kit
Order code: 2185924111
For Trimless Installation

Optional



Recessed Kit Order code: 2185924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
White	F185W1230WW	Wallwasher	F185W1240WW	White











Ceiling Recessed





Double Wash



V	Vi	d	е

CODE	F185
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White

Supply Voltage: 220-240 Vac,50Hz Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


Spot






Roni

Light distributions

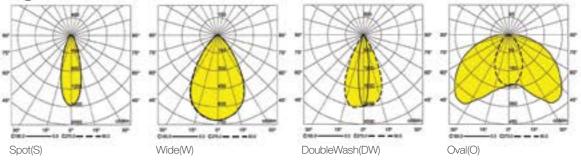

Accessories

Optional



TRecessed Kit Order code: 2185924125

Order code table -

Body Color	3000K 🥊	Beam Angle	4000K 🔮	Body Color
	F185W1230S	Spot	F185W1240S	
White	F185W1230W	Wide	F185W1240W	White
VVIIILE	F185W1230O	Oval	F185W1240O	VVIIILE
	F185W1230DW	DoubleWash	F185W1240DW	





Vertical illumination is becoming more and more important for architects and lighting designers.

It is important for architects because it reveals the feel of the space, and helps the place to become even more inviting. It is important for shop owners because it makes the shop become more visible and appear brighter from outside. In an office it helps to provide better visual comfort.

Valman



Ceiling Recessed





	1
	10.5 mm
	J
(35 m)	

CODE	F160
Light source	LED
Power (W)	30
luminous flux (lm)	3400
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White

IP 125mm


Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI Dimmable Version Available upon request

Recommended Applications: Office | Shop

^{*}Customized body colors and other color temperatures (CCTs) are available upon request

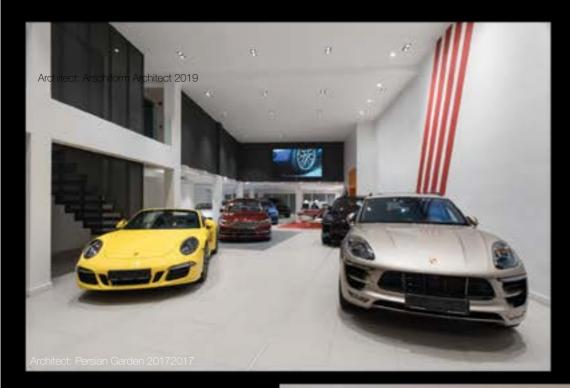









Valman



Accessories -

Optional




Trimless Installation Kit Order code: 2160924125

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
White	F160W3030WW	Wallwasher	F160W3040WW	White




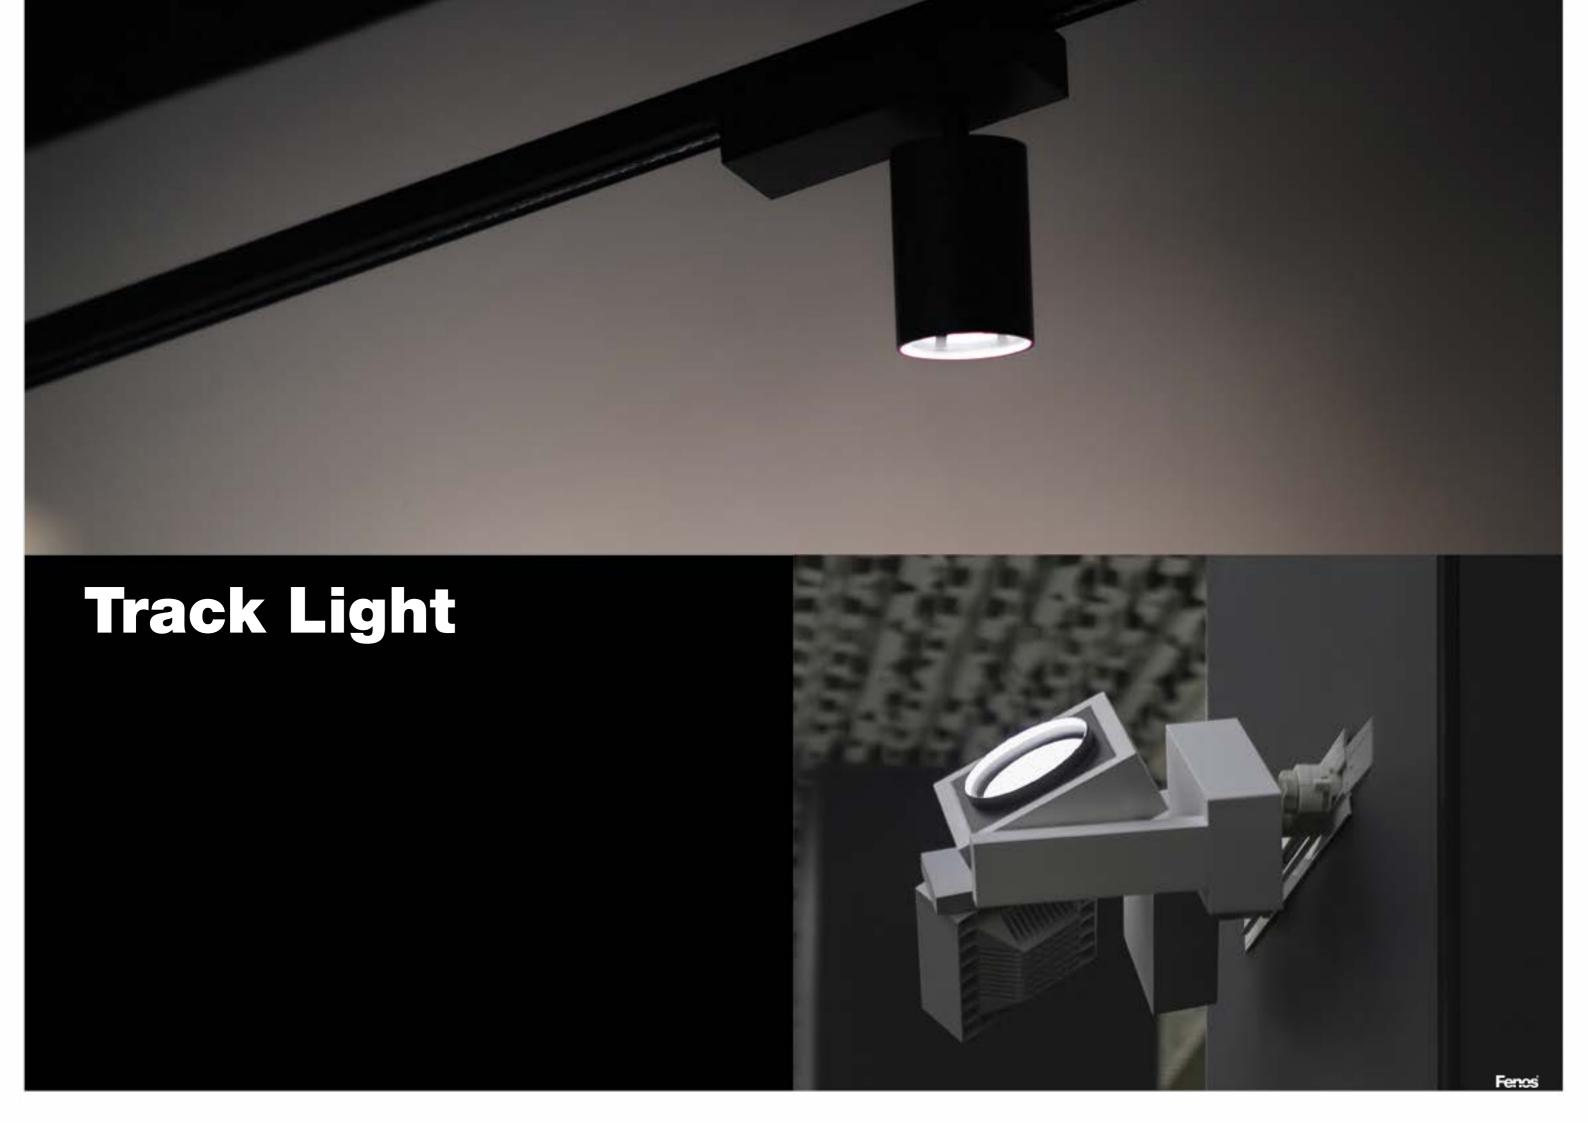

Felka Mini Track Light



Felka Mini

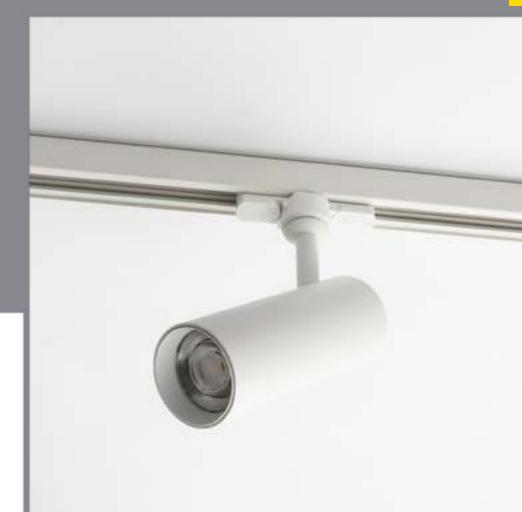

Track Light







CODE	F315
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 60mm (For RA Version)

Supply Voltage: 220-240 Vac,50Hz Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop | Gallery

Museum

9 Different light distributions for almost all applications


^{*}Customized body colors and other color temperatures (CCTs) are available upon request





Felka Mini

Light distributions

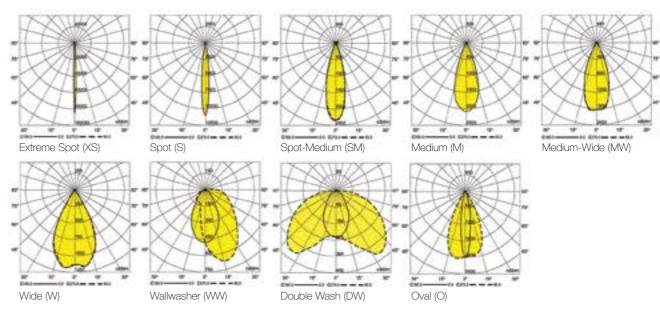

Accessories

Track



Refer to page 194

Order code table -

F315B1230WW

F315B1230DW

F315B1230O

Body Color	3000K 🔮	Beam Angle	4000K 🍨	Body Color
	F315W1230XS	Extreme Spot	F315W1240XS	
	F315W1230S	Spot	F315W1240S	
	F315W1230SM	Spot Medium	F315W1240SM	
	F315W1230M	Medium	F315W1240M	
White	F315W1230MW	Medium Wide	F315W1240MW	White
	F315W1230W	Wide	F315W1240W	
	F315W1230WW	Wallwasher	F315W1240WW	
	F315W1230DW	Double Wash	F315W1240DW	
	F315W1230O	Oval	F315W1240O	
Body Color	3000K 🔮	Beam Angle	4000K 🍨	Body Color
	F315B1230XS	Extreme Spot	F315B1240XS	
	F315B1230S	Spot	F315B1240S	
	F315B1230SM	Spot Medium	F315B1240SM	
	F315B1230M	Medium	F315B1240M	
Black	F315B1230MW	Medium Wide	F315B1240MW	Black
	E315B1230W	Wide	E315B1240W	

Wallwasher

Double Wash

F315B1240WW

F315B1240DW

F315B1240O

Felka Mini

Track Light

Felka Mini RA

Ceiling Recessed



Order code table _____

3000K 🍨	Beam Angle	4000K 🏺	Body Color
F324W1230S	Spot	F324W1240S	
F324W1230M	Medium	F324W1240M	White
F324W1230WW	Wallwasher	F324W1240WW	
F324B1230S	Spot	F324B1240S	
F324B1230M	Medium ====	F324B1240M	Black
F324B1230WW	Wallwasher	F324B1240WW	
	F324W1230S F324W1230M F324W1230WW F324B1230S F324B1230M	F324W1230S Spot F324W1230M Medium F324W1230WW Wallwasher F324B1230S Spot F324B1230M Medium	F324W1230S Spot F324W1240S F324W1230M Medium F324W1240M F324W1230WW Wallwasher F324W1240WW F324B1230S Spot F324B1240S F324B1230M Medium F324B1240M

Felka Mini SA

Surface Mounted





Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
	F318W1230S	Spot	F318W1240S	
White	F318W1230M	Medium ====	F318W1240M	White
	F318W1230WW	Wallwasher	F318W1240WW	
	F318B1230S	Spot	F318B1240S	
Black	F318B1230M	Medium ===	F318B1240M	Black
	F318B1230WW	Wallwasher	F318B1240WW	

Felka Mini S



Order code table _____

White F317W1230S Spot F317W1240S F317W1230M Medium F317W1240M	olor
F317W1230M Medium F317W1240M	
	,
F317B1230S Spot F317B1240S	
Black F317B1230M Medium F317B1240M	

Felka Mini P

Surface Mounted





Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
White	F319W1230S	Spot	F319W1240S	\\/\bita
vvriite	F319W1230M	Medium	F319W1240M	White
·	F319B1230S	Spot	F319B1240S	
Black	F319B1230M	Medium	F319B1240M	Black



Felka Midi Track Light



Felka Midi









CODE	F325
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

P 78mm (For RA Version)

Supply Voltage:
220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Office | Commercial Center
Residential | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request





Felka Midi

Light distributions

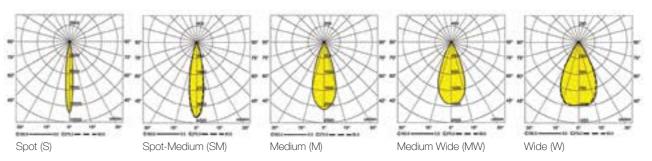

Accessories -

Track



Refer to page 194

Order code table _

Body Color	3000K 🍨	Beam Angle	4000K 🏺	Body Color
	F325W2030S	Spot	F325W2040S	
	F325W2030SM	Spot Medium	F325W2040SM	
White	F325W2030M	Medium	F325W2040M	White
	F325W2030MW	Medium Wide	F325W2040MW	
	F325W2030W	Wide	F325W2040W	

Body Color	3000K 🔮	Beam Angle	4000K 🔮	Body Color
	F325B2030S	Spot	F325B2040S	
	F325B2030SM	Spot Medium	F325B2040SM .	
Black	F325B2030M	Medium	F325B2040M	Black
	F325B2030MW	Medium Wide	F325B2040MW	
	F325B2030W	Wide	F325B2040W	

O Fenos 121

Felka Midi

Track Light

Felka Midi RA

Ceiling Recessed





Order code table _____

3000K 🍨	Beam Angle	4000K 🍨	Body Color
F329W2030S	Spot	F329W2040S	
F329W2030M	Medium	F329W2040M	White
F329W2030W	Wide	F329W2040W	
F329B2030S	Spot	F329B2040S	
F329B2030M	Medium ====	F329B2040M	Black
F329B2030W	Wide	F329B2040W	
	F329W2030S F329W2030M F329W2030W F329B2030S F329B2030M	F329W2030S Spot F329W2030M Medium F329W2030W Wide F329B2030S Spot F329B2030M Medium	F329W2030S Spot F329W2040S F329W2030M Medium F329W2040M F329W2030W Wide F329W2040W F329B2030S Spot F329B2040S F329B2030M Medium F329B2040M



Felka Midi SA

Surface Mounted






Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
	F328W2030S	Spot	F328W2040S	
White	F328W2030M	Medium	F328W2040M	White
	F328W2030W	Wide	F328W2040W	
	F328B2030S	Spot	F328B2040S	
Black	F328B2030M	Medium	F328B2040M	Black
	F328B2030W	Wide	F328B2040W	
				

Felka Midi S Surface Mounted





Body Color	3000K 💮	Beam Angle	4000K 🔮	Body Color
\\/bito	F327W2030S	Spot	F327W2040S	\\\/\b:to
White	F327W2030M	Medium	F327W2040M	White
Divi	F327B2030S	Spot	F327B2040S	D
Black	F327B2030M	Medium	F327B2040M	Black

Felka Midi P

Surface Mounted





Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
White	F326W2030S	Spot	F326W2040S	\\/\langle
vvriite	F326W2030M	Medium	F326W2040M	White
	F326B2030S	Spot	F326B2040S	
Black	F326B2030M	Medium	F326B2040M	Black



For Retail and High Ceiling Applications











CODE	F316
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

IP 100mm (For RA Version)


Supply Voltage:
220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications: Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

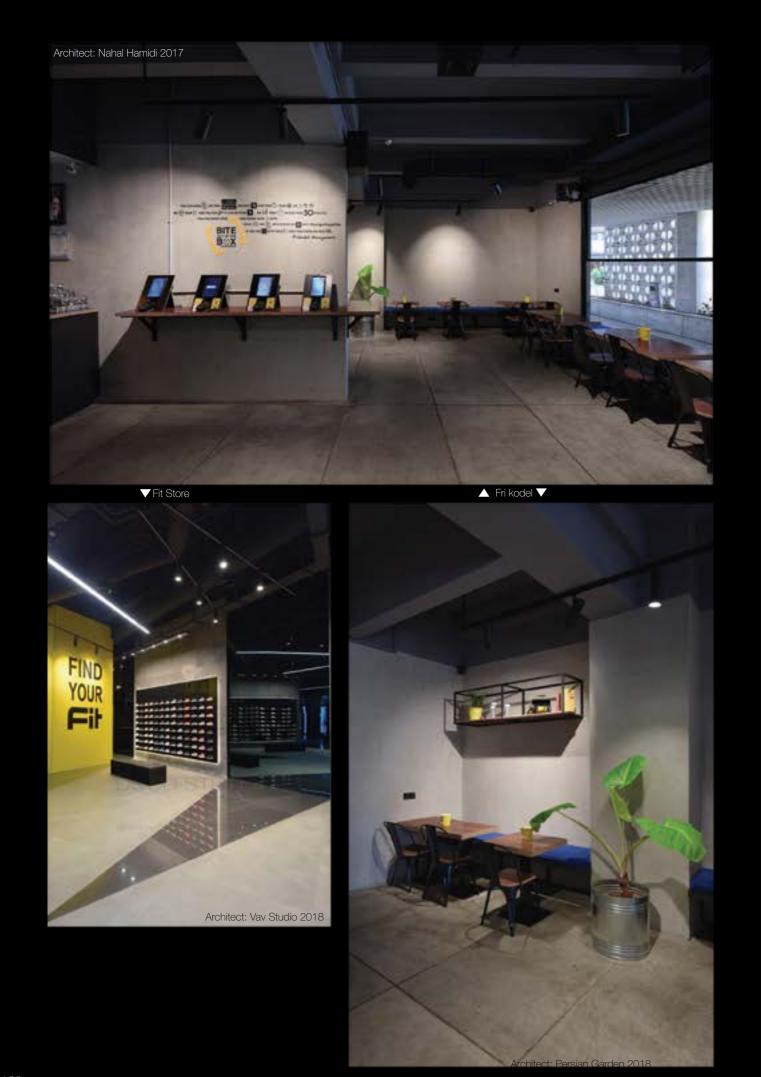

Felka Maxi

Light distributions

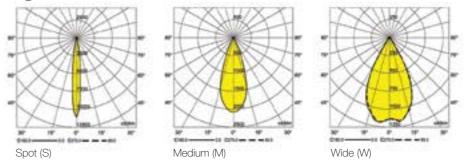

Accessories

Track



Refer to page 194

Order code table –

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
	F316W3030S	Spot	F316W3040S	
White	F316W3030M	Medium =	F316W3040M	White
	F316W3030W	Wide	F316W3040W	


Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
	F316B3030S	Spot	F316W3040S	
Black	F316B3030M	Medium	F316W3040M	Black
	F316B3030W	Wide	F316W3040W	

Felka Maxi

Track Light

Felka Maxi RA

Ceiling Recessed





Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
	F323W3030S	Spot	F323W3040S	
White	F323W3030M	Medium	F323W3040M	White
	F323W3030W	Wide	F323W3040W	
	F323B3030S	Spot	F323B3040S	
Black	F323B3030M	Medium	F323B3040M	Black
	F323B3030W	Wide	F323B3040W	

^{*} Customized body color and other light colors are also available upon request

* Customized body color and other light colors are also available upon request

Felka Maxi SA

Surface Mounted





Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
	F322W3030S	Spot	F322W3040S	
White	F322W3030M	Medium	F322W3040M	White
	F322W3030W	Wide	F322W3040W	
	F322B3030S	Spot	F322B3040S	
Black	F322B3030M	Medium	F322B3040M	Black
	F322B3030W	Wide	F322B3040W	





Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
\\/\b:t-a	F321W3030S	Spot	F321W3040S)
White	F321W3030M	Medium	F321W3040M	White
Dlask	F321B3030S	Spot	F321B3040S	Disals
Black	F321B3030M	Medium	F321B3040M	Black

* Customized body color and other light colors are also available upon request

Felka Maxi P

Surface Mounted





Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🔮	Body Color
White	F320W3030S	Spot	F320W3040S	White
VVIIILE	F320W3030M	Medium	F320W3040M	vviiite
	F320B3030S	Spot	F320B3040S	
Black	F320B3030M	Medium	F320B3040M	Black

* Customized body color and other light colors are also available upon request

Felka Maxi S



Pelka Track Light

For a Modern Architecture

Pelka



Track Light



CODE	F310
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available

upon request Recommended Applications: Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request







Light distributions



Accessories -

Track



Refer to page 194


Order code table _

Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
\\/hito	F310W3030S	Spot	F310W3040S	\\/bito
White	F310W3030W	Wide	F310W3040W	White

Body Color	3000K 🌵	Beam Angle	4000K 🍨	Body Color
Black	F310B3030S	Spot	F310B3040S	Black
	F310B3030W	Wide	F310B3040W	DIACK








Track Light





CODE	F300
Light source	LED
Power (W)	35
luminous flux (lm)	3650
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:

Office | Shop | Museum



For Retail and High Ceiling Applicaitons

134


^{*}Customized body colors and other color temperatures (CCTs) are available upon request







Light distributions



Accessories

Track



Refer to page 194

Order code table -

Black

F300B3530S

F300B3530W

Body Color	3000K 🍨	Beam Angle	4000K 🔮	Body Color
\\/\bita	F300W3530S	Spot	F300W3540S	\A/le:te
White	F300W3530W	Wide	F300W3540W	White
Body Color	3000K 🍨	Beam Angle	4000K 🔮	Body Color

F300B3540S


F300B3540W

Black

Vera Twin Track Light



Vera Twin

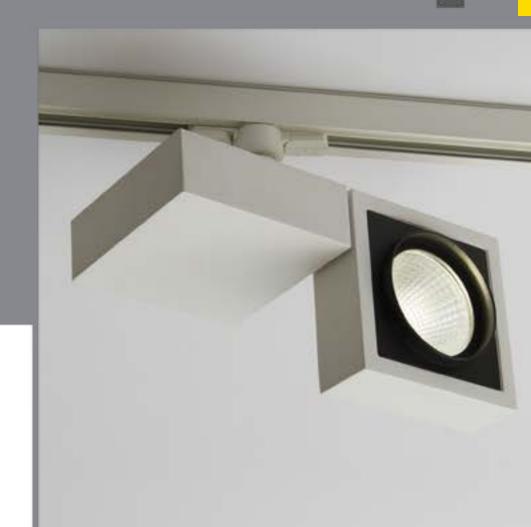

Track Light





CODE	F305
Light source	LED
Power (W)	35
luminous flux (lm)	3850
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 20


Supply Voltage: 220-240 Vac,50Hz Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


Powerful track light with low height and high flexibility in installation

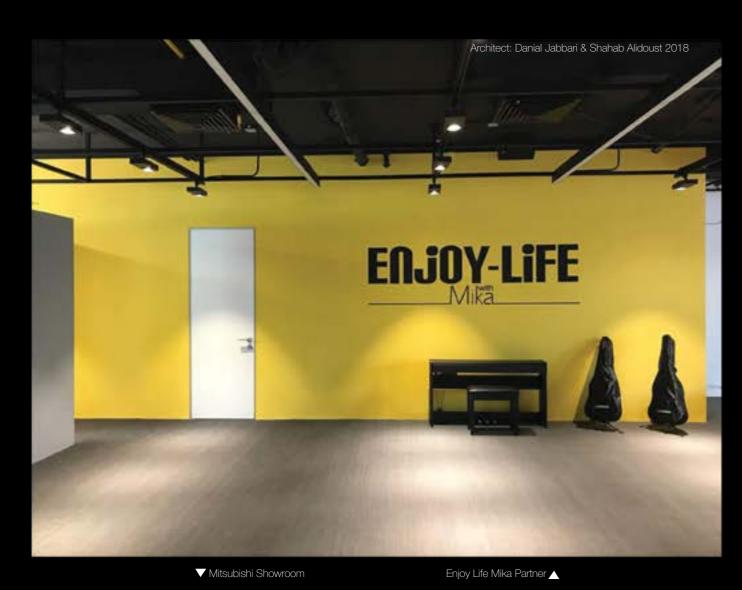



Vera Twin

Light distributions



Accessories -

Track



Refer to page 194

Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🍨	Body Color
White	F305W3530S	Spot	F305W3540S	\\\/\b:to
	F305W3530W	Wide	F305W3540W	White

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
Black	F305B3530S	Spot	F305B3540S	Black
Diack	F305B3530W	Wide	F305B3540W	Diack

Fences 141

Sira S 1616 Profile


Sira S 1616 Profile

CODE Light source Body Color F465 LED White | Black | Silver

Recommended Applications:
Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

Very small and compact, suitable for many applications where size is limited

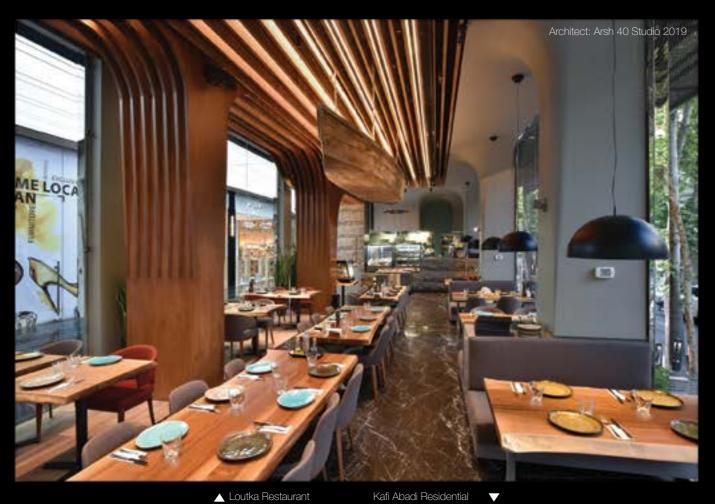



Sira S 1616




Accessories -

Surface Installation







LED Strip Refer to page 196



Krab Refer to page 196

Order code table —

Body Color	Order Code	Beam Angle	
White	F465WW	Wide	
Black	F465BW	Wide	
Silver	F465SW	Wide	

Sira R 1616 Profile





Very small and compact, suitable for recessed applications where size is limited such as shelf lighting.



CODE	F415
Light source	LED
Body Color	White Black Silver


IP 17mm Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request



Sira R 1616

Light distributions -



Accessories

Recessed Installation



Sira R 1616 Bracket

Optional



LED Strip Refer to page 196


Order code table —

Body Color	Order Code	Beam Angle	
White	F415WW	Wide	
Black	F415BW	Wide	
Silver	F415SW	Wide	





Sira OL

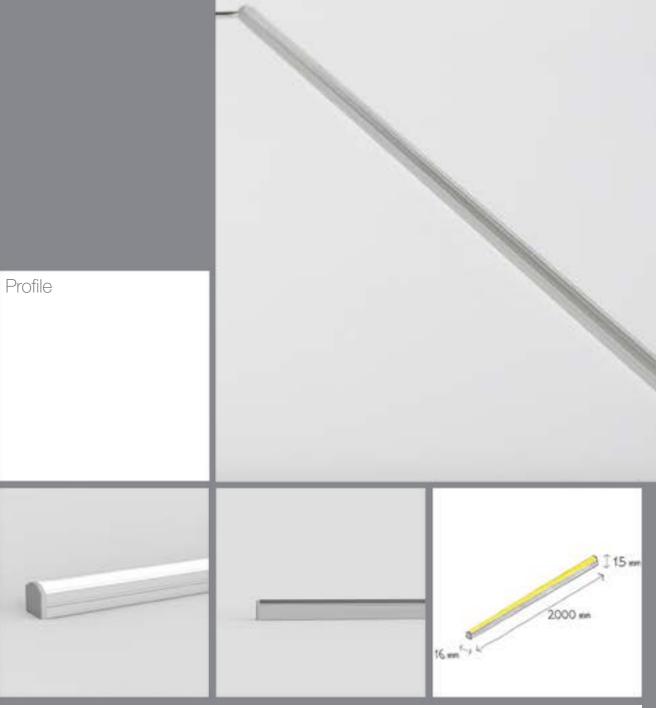


CODE	F465
Light source	LED
Body Color	Silver

Recommended Applications:
Residential | Office | Shop | Garden
Facade

 $^*\mbox{Customized}$ body colors and other color temperatures (CCTs) are available upon request


Very small and compact, suitable for many applications where size is limited

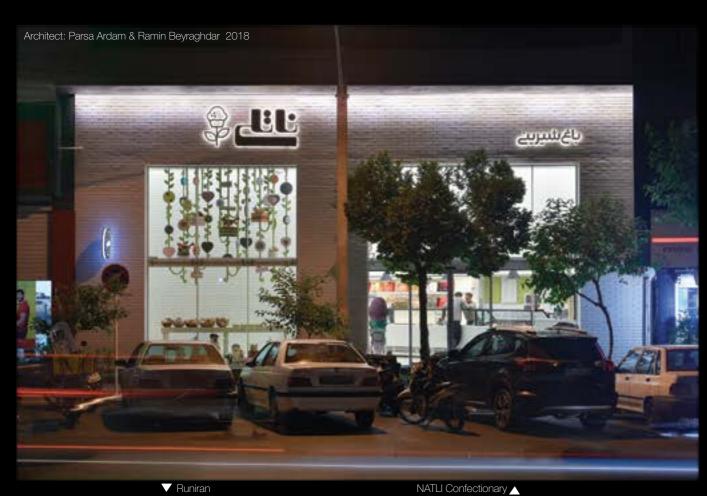




Sira OL

Light distributions



Accessories





Sira OL Bracket

Optional




Refer to page 196

Order code table _____

Body Color	Order Code	Beam Angle	
Silver	F465SW	Wide	

Sira S 6090 Surface Linear

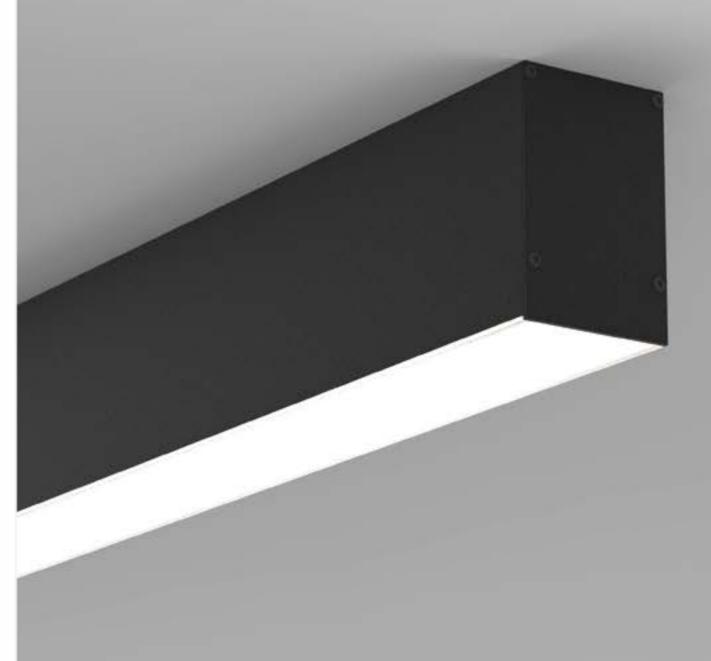

Sira S 6090



CODE	F451
Light source	LED
Power (W)	30 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black



Driver:

DALI|Dimmable Version Available upon request


Recommended Applications: Residential | Office | Shop

Trimless Version

Continuous Linear light with 60 mm light emitting width


^{*114}Cm:35W | 168Cm:50W

^{**}Customized body colors and other color temperatures (CCTs) are available upon request

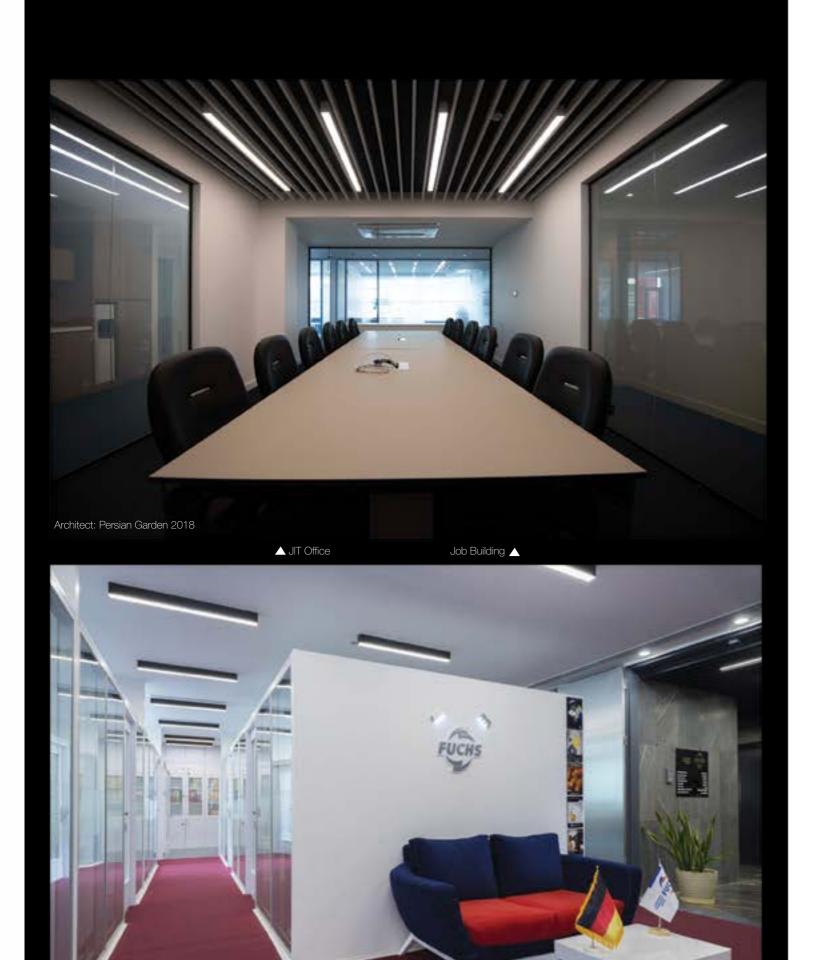


Sira S 6090

Light distributions -



Accessories

Optional



Trimless Installation Kit Order code: 2451924125

For more details refer to installation details in our website

Optional



Solid Aluminium Cover Order code:

White: 2451215106 Black: 2451115106

Order code table _____

Body Color	3000K 🌻	Length (cm)	4000K 🍨	Body Color
\\/hito	F451W3530W	114	F451W3540W	\\/\frac{1}{2}
White	F451W5030W	168	F451W5040W	White

Body Color	3000K 🔮	Length (cm)	4000K 🔮	Body Color
Black	F451B3530W	114	F451B3540W	Black
Diack	F451B5030W	168	F451B5040W	Diack


The above order table code is for standard lengths of 114 and 168 cm. To oder other lengths, than standard shapes, please refer to our sales support team to help you.

Fenos 157

Architect: Mani Sadraei 2017




Sira P 6090

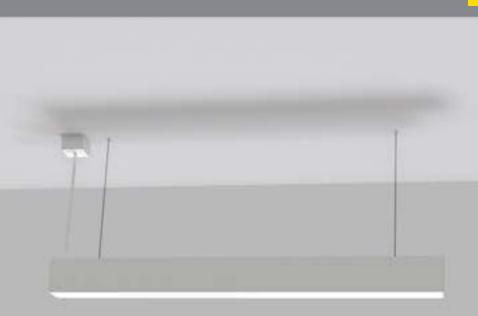

Pendant Linear





CODE	F453
Light source	LED
Power (W)	30 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black

IP 20

Supply Voltage: 220-240 Vac,50Hz

Driver:


DALI|Dimmable Version Available upon request


Recommended Applications:
Residential | Office | Shop

Continuous Linear light with 60 mm light emitting width

^{*114}Cm:35W | 168Cm:50W


^{**}Customized body colors and other color temperatures (CCTs) are available upon request

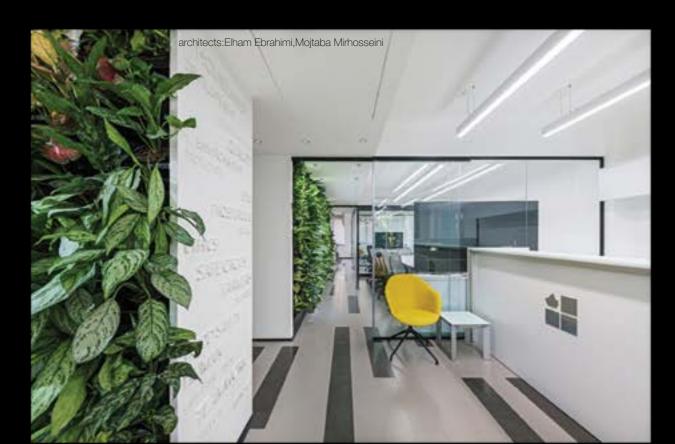

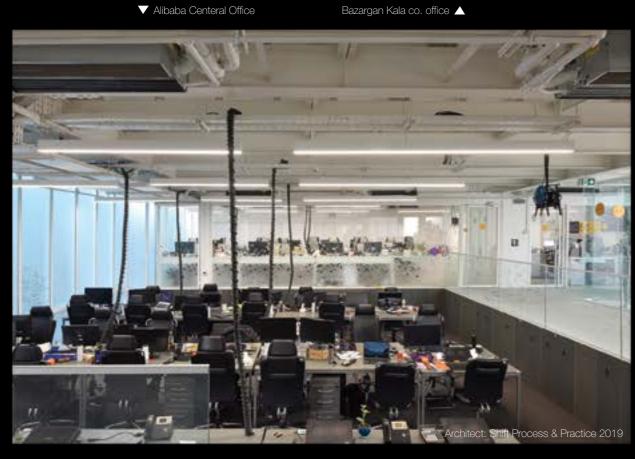

Sira P 6090

Light distributions



Accessories

Optional



Trimless Cable Base Order code: 2453224110

Optional



Solid Aluminium Cover Order code: White: 2451215106 Black: 2451115106

Order code table _____

Body Color	3000K 🍨	Length (cm)	4000K 🍨	Body Color
\\/\b:t-a	F453W3530W	114	F453W3540W)A(l- :+ -
White	F453W5030W	168	F453W5040W	White

Body Color	3000K 🌻	Length (cm)	4000K 🌵	Body Color
Black	F453B3530W	114	F453B3540W	Black
Diack	F453B5030W	168	F453B5040W	Diack

The above order table code is for standard lengths of 114 and 168 cm. To oder other lengths, than standard shapes, please refer to our sales support team to help you.

Sira R 6090 Recessed Linear



Sira R 6090





Recessed Linear



CODE	F452
Light source	LED
Power (W)	30 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black

IP 70mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI Dimmable Version Available

upon request


Recommended Applications:
Residential | Office | Shop

Continuous Linear light with 60 mm light emitting width

^{*114}Cm:35W | 168Cm:50W

 $^{^{\}star\star}\textsc{Customized}$ body colors and other color temperatures (CCTs) are available upon request





Accessories

Optional



Solid Aluminium Cover Order code:


White:2451215106 Black: 2451115106

Order code table _____

Body Color	3000K 🍨	Length (cm)	4000K 🌵	Body Color
White	F452W3530W	114	F452W3540W	\\/\bito
vvriite	F452W5030W	168	F452W5040W	White

Body Color	3000K 🌻	Length (cm)	4000K 🍨	Body Color
Black	F452B3530W	114	F452B3540W	Black
Diack	F452B5030W	168	F452B5040W	Black

The above order table code is for standard lengths of 114 and 168 cm. To oder other lengths, than standard shapes, please refer to our sales support team to help you.

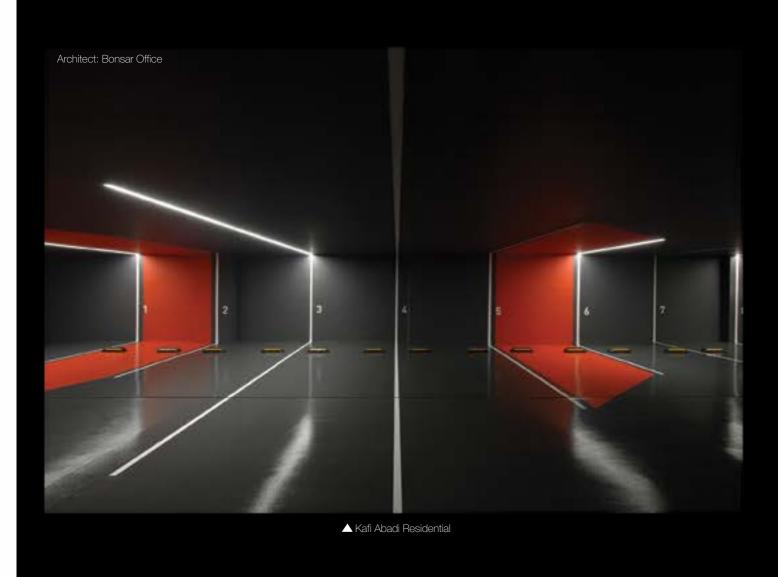

Sira R 6040

Recessed Linear




Sira R 6040







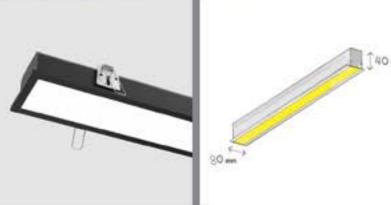

CODE	F403
Light source	LED
Power (W)	30
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 70mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request



▲ Charima Office

Sira R 6040



Accessories -

Optional



Solid Aluminium Cover Order code:

White:2451215106 Black: 2451115106


Order code table _____

Body Color	3000K 🍨	Length (cm)	4000K 🔮	Body Color
White	F403W3530W	114	F403W3540W	\\/\b:+-
vvriite	F403W5030W	168	F403W5040W	White

Body Color	3000K 🔮	Length (cm)	4000K 🔮	Body Color
Black	F403B3530W	114	F403B3540W	Black
Diack	F403B5030W	168	F403B5040W	Black

The above order table code is for standard lengths of 114 and 168 cm. To oder other lengths, than standard shapes, please refer to our sales support team to help you.

Outdoor Lighting

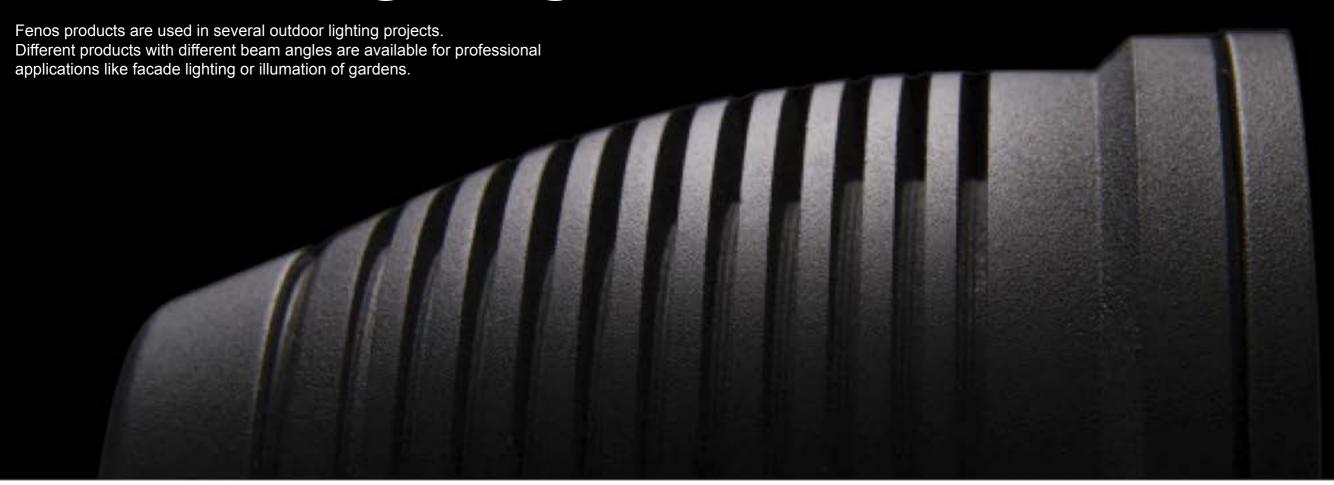

Silva Midi Floor Surface



Continuous Linear light with 60 mm light emitting width

Silva Midi







CODE	F920
Light source	LED
Power (W)	13
luminous flux (lm)	1400
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver

IP 65

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop
Facade Lighting


*Customized body colors and other color temperatures (CCTs) are available upon request





Silva Midi

Light distributions

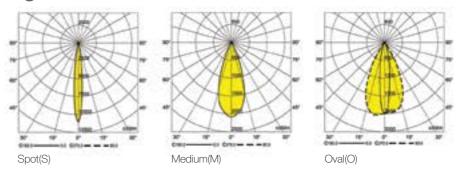

Accessories -

Order code table _____

Body Color	3000K 🍨	Beam Angle	4000K 🏺	Body Color
	F920S1330S	Spot	F920S1340S	
Silver	F920S1330M	Medium	F920S1340M	Silver
	F920S1330O	Oval	F920S1340O	

Silva Maxi Floor Surface



Silva Maxi

Floor Surface







ı	
ı]70 m
ı	170C 985 mm
ķ	10 m
ı	60mm
ш	

CODE	F925
Light source	LED
Power (W)	40
luminous flux (lm)	3240
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver

IP 65

Supply Voltage: 220-240 Vac,50Hz Driver:

DALI Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop
Facade Lighting


^{*}Customized body colors and other color temperatures (CCTs) are available upon request



▲ Park Cente

Silva Maxi

Light distributions

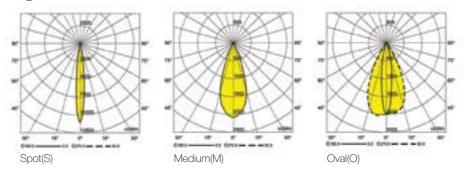

Accessories _____

Order code table _____

Body Color	3000K 👰	Beam Angle	4000K 🔮	Body Color
	F925S4030S	Spot	F925S4040S	
Silver	F925S4030M	Medium	F925S4040M	Silver
	F925S4030O	Oval	F925S4040O	

^{*}Customized body color and other light distribution are also available upon request

Vaswa Midi


Exterior Projector



Compact and powerful Small projector for facade and garden lighting Vaswa Midi









89	2 m. Z	2	Ø90)	nyn.
	1	(30	1	
)	43**
280	CIT	4	1	

CODE	F900
Light source	LED
Power (W)	8
luminous flux (lm)	800
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Gray


IP 65

Supply Voltage:
220-240 Vac,50Hz

Recommended Applications:
Residential | Office | Shop
Facade Lighting | Garden


*Customized body colors and other color temperatures (CCTs) are available upon request



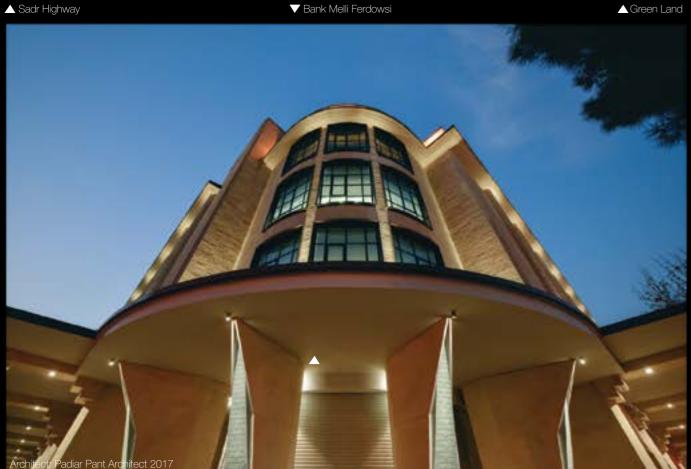

Vaswa Midi

Light distributions



Accessories -

Order code table —

Body Color	3000K 🌵	Beam Angle	4000K 🍨	Body Color
Grav	F901G830S	Spot	F901G840S	Grey
Gray	F901G830M	Medium	F901G840M	Cirey

Vaswa Maxi

Exterior Projector



Vaswa Maxi



Exterior Projector





CODE	F905
Light source	LED
Power (W)	12
luminous flux (lm)	1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Gray

IP 65


Supply Voltage:
220-240 Vac,50Hz

Recommended Applications:
Residential | Office | Shop
Facade Lighting | Garden

^{*}Customized body colors and other color temperatures (CCTs) are available upon request



Vaswa Maxi



Accessories —

Order code table _____

Body Color	3000K 🌻	Beam Angle	4000K 🍨	Body Color
Gray	F905B1230XS	Extreme Spot	F905B1240XS	Gray

Torso Wall Mounted



Torso

Wall Mounted









CODE	F640
Light source	LED
Power (W)	2x6
luminous flux (lm)	2x600
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black Gray


IP 65

Supply Voltage:
220-240 Vac,50Hz

Recommended Applications:
Residential | Facade Lighting

*Customized body colors and other color temperatures (CCTs) are available upon request

For facade and landscape For delightful outdoor atmosphere

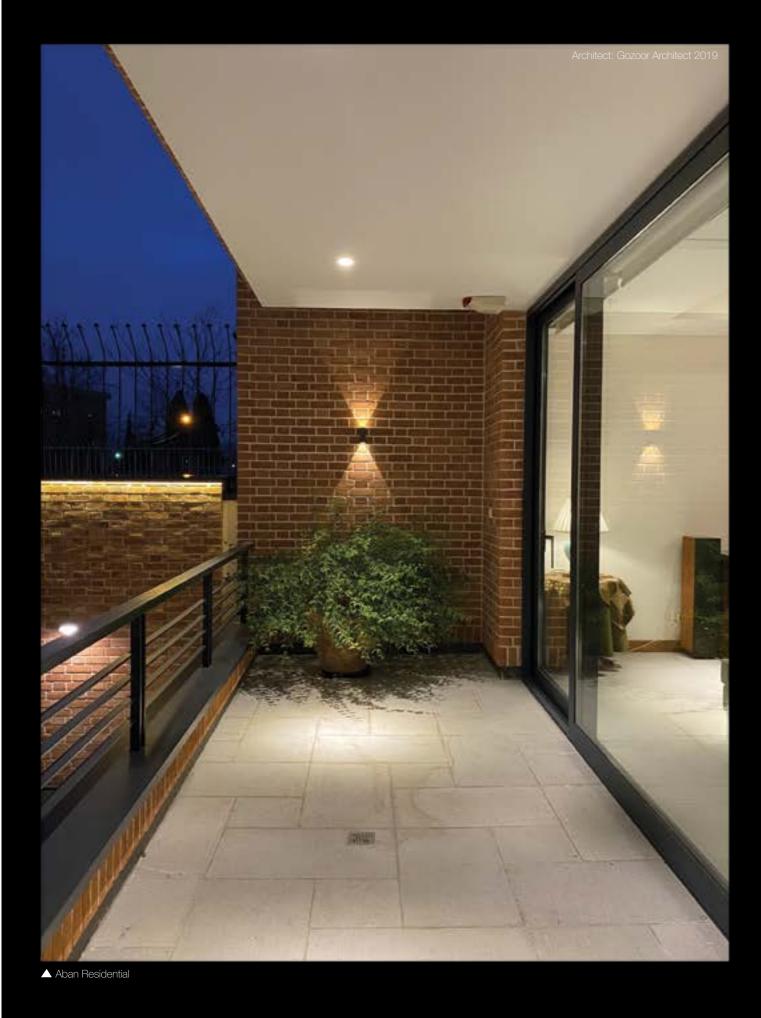

Torso

Light distributions -

Accessories

Optional



Double LED GU10 Lamp Order code: 10020101

Order code for GU10 version* —

Body Color	Order Code	
White	F940WG	
Black	F940BG	
Gray	F940GG	

Lamp is not included*





Accessories

Accessories —

Surface Track 3Phase

Body Color	Order Code	Lenght(m)	Order Code	Body Color
	25106	1	25102	
White	25206	2	25202	Black
VVIIIC	25306	3	25302	Black
	25406	4	25402	



End Cap

Order Code		Body Color
555112171	555112172	Black



End Feed(earth right)

Body Color	C	order Code	Body Color
White	555112011	555112012	Black



End Feed(earth left)

Body Color		Order Code	Body Color
White	555112021	555112022	Black



X Coupler(with feeding option)

Body Color		Order Code	Вос	dy Color
White	555112161	555112162		Black

Accessories —



L Coupler(with feeding option earth outside)

Body Color	Order Code		Body Color
White	555112091	555112092	Black



L Coupler (with feeding option earth inside)

Body Color		Order Code	Body Color
White	555112101	555112101	Black



I Coupler (with feeding option)

Body Color		Order Code	Body Color
White	555112081	555112082	Black



Flex Coupler (30 to 330 degree with feeding option)

Body Color		Order Code	Body Color
White	555112111	555112112	Black



T Coupler(with feeding option earth inside right)

Body Color	0	rder Code	Body Color
White	555112121	555112122	Black

Accessories



T Coupler(with feeding option earth inside left)

Body Color		Order Code	Body Color
White	555112131	555112132	Black




T Coupler(with feeding option earth outside right)

Body Color		Order Code	Body Color
White	555112141	555112142	Black



T Coupler(with feeding option earth outside left)

Body Color		Order Code	Body Color
White	555112151	555112152	Black



Krab


Body Color		Order Code	Body Color
White	FE10W6036	FE10B6036	Black



Beno LED Strips


Order Code	Power(W/m)	Voltage(V)	CCT(K)
F80014306033	14	24 V-DC	3000
F80014406033	14	24 V-DC	4000
F80010306033	10	24 V-DC	3000
F80010406033	10	24 V-DC	4000


Earth Run Layout Help

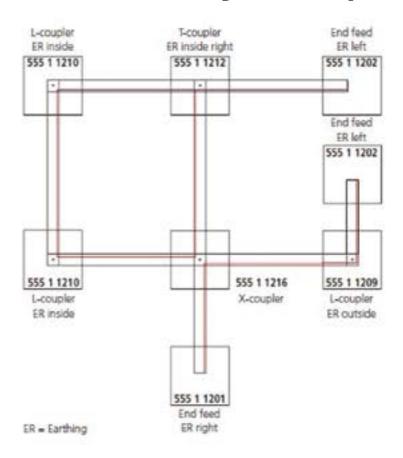


Surface Track 3Phase

Mechanical Load









3- track wiring diagram

a) Connection to AC 230V (220 - 240V) maximum load: 3.600 W (3.500 - 3.800 W) Total load can spread on any circuit

fuse power supply cable power supply cable 1 x 16 A min. 3 x 1.5 mm² min. 3 x 2.5 mm²



Guide To Fenos Products Coding

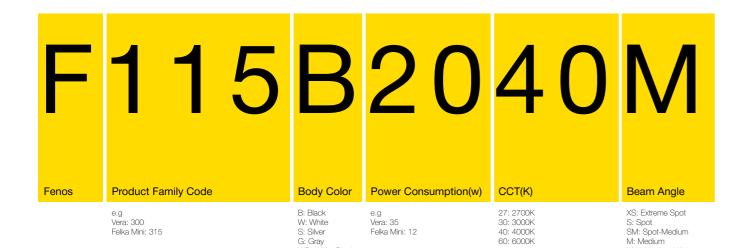

WB: White-Black


Alephabetic index

Darklans	14
Eyden L	80
Eyden Mini	76
Eyren Micro	18
Felka Maxi	124
Felka Midi	118
Felka Mini	110
Filde Micro	22
Filde Mini	26
Fitran Q	90
LED Strip	194
Nian	60
Pelka	130
Rico	30
Roni WW	94
Roni	98
Sibron CF-TR	34
Sibron C Maxi	50
Sibron C Midi	46
Sibron C Micro	38
Sibron C Mini	42

Sibron Q Maxi	72
Sibron Q Midi	68
Sibron Q Mini	64
Silva Maxi	176
Silva Maxi Silva Midi	172
Sira OL	150
Sira P 6090	158
Sira R 1616	146
Sira R 6040	166
Sira R 6090	162
Sira S 1616	142
Sira S 6090	154
Tiran C Mini	54
Tiran S	84
Torso	188
Valman	102
Vaswa Maxi	184
Vaswa Midi	180
Vera	134
Vera Twin	138


MW: Medium Wide


W: Wide WW: Wall Washer DW: Double Wallwasher

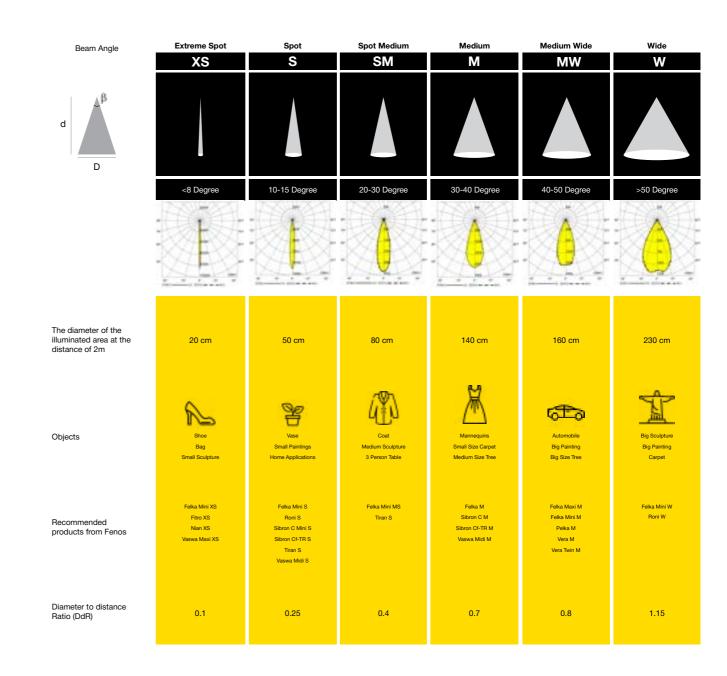

Installation Instruction

Trimless Lights

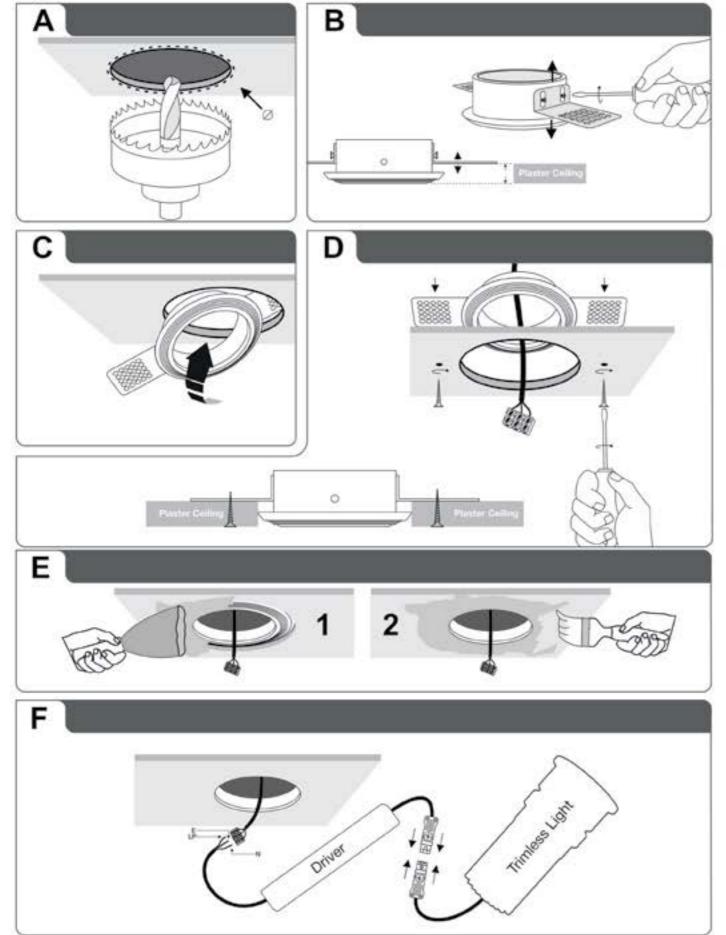

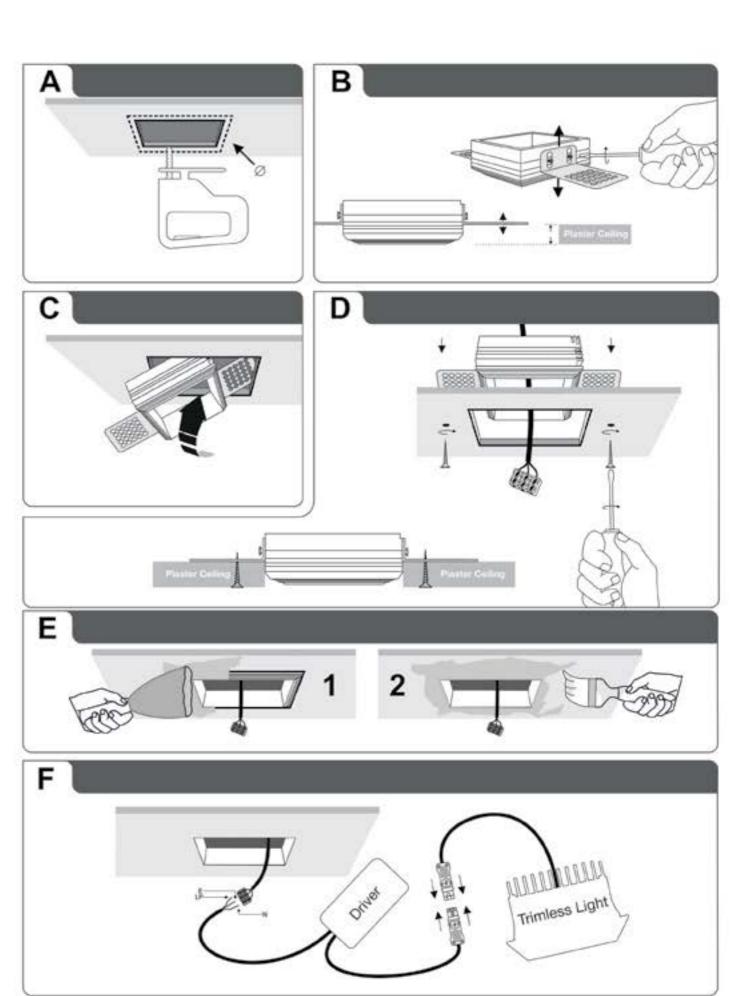

202

